



See up to 15 feet in the dark



Wireless Range Extender



Sound & motion detection alerts



See every detail with 4x digital zoom



WPS and mobile app for easy setup



mydlink® apps for remote viewing



DCS-933L DAY & NIGHT WI-FI CAMERA

Features

Premium Resolution and Visibility

- See up to 15 feet in complete darkness with built-in IR LEDs
- Supports H.264/M-JPEG video codecs
- 4x digital zoom for close-up viewing
- Built-in microphone¹

Security

- Sound & motion detection triggers e-mail/push alert notifications
- Save snapshots/video clips to your mobile device

Ease of Use

- Uses the Wireless N technology so you can install the camera anywhere with ease
- WPS support for easy wireless connection
- Extender mode for expanding wireless range

Convenient Control with mydlink® Support

- mydlink app support for iPhone, iPad, Android and Windows phone
- mydlink portal for easy viewing and management

Overview

The Day & Night Wi-Fi Camera (DCS-933L) delivers high-quality video for remote viewing on the mobile devices you already own. And with a built-in ICR filter and IR LEDs, you'll also get clear images in complete darkness to provide you with the ideal 24-hour monitoring solution. Integrated sound/motion-sensing technology detects changes within the camera's environment, triggering instant email alerts. Round the clock notification delivers an additional layer of security and confidence.

Connect to More


Connecting your D-Link camera with any router is easy – make it even easier with your D-Link Cloud Router. Zero Configuration automatically configures and intelligently syncs your D-Link camera to your mydlink account – it's as easy as connect and view! The built-in Wi-Fi extender provides a convenient way to expand your wireless network. Placing the camera within your current network area expands your Wi-Fi signal, providing effortless connectivity to more rooms and more devices, making dead zones a thing of the past.

Convenient Access Anytime, Anywhere with mydlink®

Enhanced with mydlink® support, the Day & Night Wi-Fi Camera makes it easy and convenient for you to look after your family, pets, home or small business. With a mydlink enabled camera, you can stay connected to everything you love from anywhere, anytime. Access your camera through the mydlink website or one of the mydlink mobile apps to view and manage your camera through your desktop, laptop, tablet or mobile phone, no matter where you are.



Front View

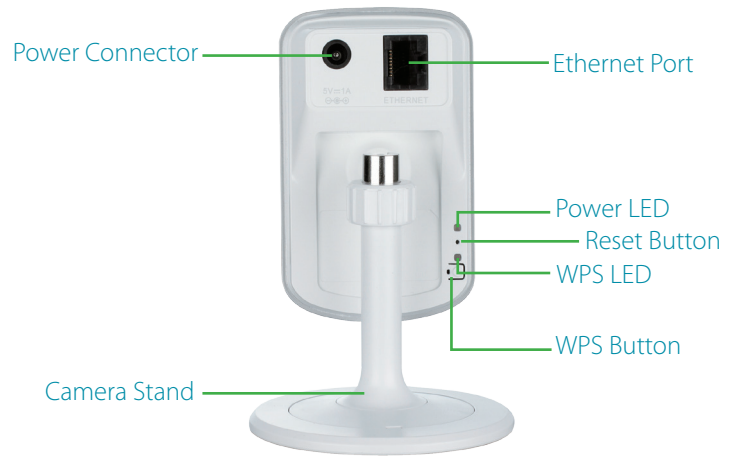

Back View

Technical Specifications

Camera

Hardware Profile	<ul style="list-style-type: none"> • 1/5" VGA CMOS sensor • 15 feet IR illumination distance • 0 lux with IR LEDs on • Built-in Infrared-Cut Removable (ICR) Filter module • 4x digital zoom • Focal length: 3.15 mm • Aperture: F2.8 	<ul style="list-style-type: none"> • Angle of view: <ul style="list-style-type: none"> • (H) 45.3° • (V) 34.5° • (D) 54.9° • Built-in microphone • Exposure time: 1/15-1/15,000 sec.
Image Features	<ul style="list-style-type: none"> • Adjustable image size, quality, frame rate and bit rate • Configurable brightness, saturatio and contrast • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Flip and mirror
Video Compression	<ul style="list-style-type: none"> • H.264/MJPEG 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • 640 x 480 at up to 30 fps • 320 x 240 at up to 30 fps 	<ul style="list-style-type: none"> • 160 x 120 at up to 30 fps
Audio	<ul style="list-style-type: none"> • PCM 	
External Device Interface	<ul style="list-style-type: none"> • Power Connector • 10/100Base-T Ethernet • Power L:ED 	<ul style="list-style-type: none"> • WPS LED • WPS Button • Reset Button

Network

Network Protocols	<ul style="list-style-type: none"> • IPV4, ARP, TCP, UDP, ICMP • DHCP Client • NTP Client (D-Link) • DNS Client • DDNS Client (D-Link) • SMTP Client 	<ul style="list-style-type: none"> • FTP Client • HTTP Server • PPPoE • UPnP Port Forwarding • LLTD
Security	<ul style="list-style-type: none"> • User/password authentication 	<ul style="list-style-type: none"> • HTP digest encryption
Wireless Connectivity	<ul style="list-style-type: none"> • 802.11n/g/b wireless with WEP/WPA-PSK/WPA2-PSK encryption 	<ul style="list-style-type: none"> • Operates on 2.4GHz frequency band

DCS-933L DAY & NIGHT WI-FI CAMERA

System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> Operating system: Microsoft Windows 8/7², XP SP3², Vista² or Mac OS X (10.5 and above) 	<ul style="list-style-type: none"> Browser: Internet Explorer 6, Firefox 12 or above, Safari 4 or above, Chrome 20 or higher with Java installed and enabled
Event Management	<ul style="list-style-type: none"> Event notification and uploading of snapshots/video clips via e-mail (SMTP) or FTP 	<ul style="list-style-type: none"> Motion detection Sound level detection
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> Operating system: Microsoft Windows 7, XP, Vista Browser: Internet explorer 7 or higher 	<ul style="list-style-type: none"> Protocol: Standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen 	<ul style="list-style-type: none"> Scheduled motion triggered, or manual recording options Supports all management functions provided in web interface
Remote Access		
Remote Management	<ul style="list-style-type: none"> Configuration accessible via web browser 	
Mobile Support	<ul style="list-style-type: none"> mydlink Lite app for iOS, Android and Windows 	<ul style="list-style-type: none"> mydlink+ app for iOS and Android
General		
Weight	<ul style="list-style-type: none"> 0.21 lbs 	
Power	<ul style="list-style-type: none"> 5 V DC 1 A, 50/60 Hz 	
Power Consumption	<ul style="list-style-type: none"> 4 watts 	
Temperature	<ul style="list-style-type: none"> Operating: 32 to 104 °F (0 to 40 °C) 	<ul style="list-style-type: none"> Storage: -4 to 158 °F (-20 to 70 °C)
Humidity	<ul style="list-style-type: none"> Operating: 20% to 80% non-condensing 	<ul style="list-style-type: none"> Storage: 20% to 80% non-condensing
Certifications	<ul style="list-style-type: none"> CE CE LVD 	<ul style="list-style-type: none"> FCC Class B C-Tick
Dimensions	<ul style="list-style-type: none"> 3.14 x 4.52 x 3.14 inches 	
Package Contents	<ul style="list-style-type: none"> Day & Night Wi-Fi Camera (DCS-933L) Power adapter Ethernet cable 	<ul style="list-style-type: none"> Camera base and mounting kit Quick install guide
Order Information		
<i>Part Number</i>	<i>Description</i>	
DCS-933L	Day & Night Wi-Fi Camera	


¹ Use of audio or video equipment for recording the image of a person without their knowledge and consent is prohibited in certain states or jurisdictions. The end-user assumes all liability for compliance with applicable state, local and federal laws.

² Computer must adhere to Microsoft's recommended system requirements.

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

©2015 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, mydlink and the D-link RoHS logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. iPhone and iPad are registered trademarks of Apple Inc. Android is a trademark of Google Inc. Windows is a registered trademark of Microsoft Inc.



mydlink Lite only

D-Link®