



## Product Highlights

### Scalable, Flexible, Centralized AP Management

Manage up to 500 APs from a single location, complete with a multi-tenant structure that provides multi-layer management authority

### Remote Access Made Easy

Access Central WiFiManager anytime, anywhere through the Internet by using a web browser on your PC, smartphone or tablet

### Built For Business

Enterprise-level features such as bandwidth optimization, captive portal and RF optimization help satisfy the needs of the modern business environment

CWM-100



# Central WiFiManager Software Controller

## Features

### Web-based management

- Can be installed on a Microsoft Windows computer<sup>1</sup>
- Can be accessed through any device with a web browser such as a smartphone, tablet or computer

### Multi-site management

- Multiple distributed sites can be managed from a central location
- Multi-tenant architecture provides multilayer management authority

### NAT pass-through

- Can manage wireless access points in remote locations even if they are behind a NAT device (router or firewall)

### Captive portal and access control

- Supports local DB, external RADIUS, LDAP, POP3 and Wi-Fi passcode authentication
- Supports user access control

### Auto radio frequency (RF) management

- Supports automatic channel and output power optimization

### Bandwidth optimization

- Optimizes wireless bandwidth

## Overview

D-Link® Central WiFiManager software controller helps network administrators streamline their wireless access point (AP) management workflow. Central WiFiManager is an innovative approach to the more traditional hardware-based multiple access point management system. It uses a centralized server to both remotely manage and monitor wireless APs on a network. Whether deployed on a local computer or hosted on a public cloud service, Central WiFiManager can be easily integrated into existing networks in conjunction with supporting D-Link wireless APs, to help eliminate existing bottlenecks for wireless traffic.

## Extendable, Affordable Business Wireless Solution


Designed from the ground up as a standalone software controller, D-Link Central WiFiManager is flexible, robust, and feature rich. It comes ready to run with many enhanced enterprise wireless access point features to provide a solid wireless network system for customers who need a centralized management controller. Central WiFiManager can be deployed on a server running Microsoft Windows<sup>1</sup> and can manage up to 500 APs without additional license charges.<sup>2</sup> Central WiFiManager currently supports eight different models of D-Link Access Points.<sup>3</sup>

## Robust Security and Management Tools


Central WiFiManager supports multi-site deployment management as well as multi-tenancy management. This allows network administrators to provide different management authorities between head and regional offices, and allows service providers to offer a managed wireless network for their customers. Sites can be logically separated with their own configuration, access security, network map, and statistics. For example, a network operations manager could pre-configure APs before dispatching them to regional offices.

## Central WiFiManager Software Controller

He could then manage all of the APs on an enterprise intranet, while allowing local administrators to manage a subset of APs that are only present on their local network. The service provider can simply send a pre-configured AP to a customer and then remotely manage the customer's wireless network access and security.

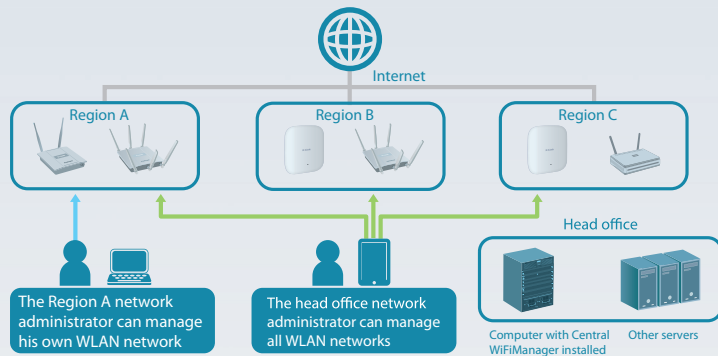

For wireless access, D-Link SMB APs can support 8 SSIDs per radio, which means administrators can use one SSID to create a guest network for visitors. Central WiFiManager expands on that built-in feature and allows for multiple user authentications. Access controls can be configured per SSID as well, allowing network administrators to configure separate internal networks for different subnets. This means that more advanced value added services such as a captive portal or Wi-Fi hotspots can be used to help manage wireless network traffic.

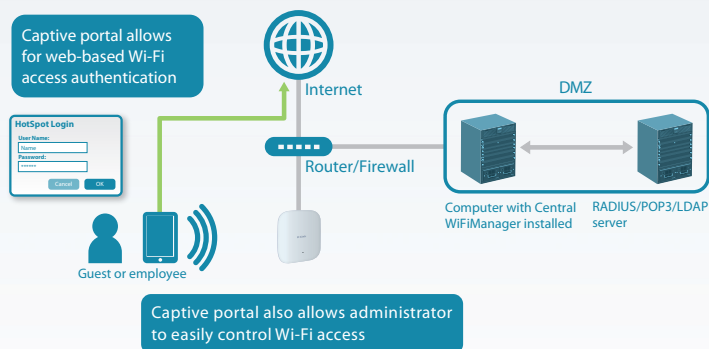


### Flexible Expansion and Deployment Options

Unlike traditional hardware controller solutions for managing wireless access points, Central WiFiManager has a much lower initial investment cost as it comes bundled with select D-Link access points<sup>3</sup> and there are no per access point license charges. With the simple to use installation tool, it is easy to expand the wireless network in the future. Adding devices to Central WiFiManager is done automatically when new access points are discovered on the network, allowing new devices to be quickly managed and deployed.


Central WiFiManager also automatically manages RF output for multiple access points, optimizing the number of available wireless channels and coverage.

This results in reduced channel interference and provides faster total bandwidth throughput and connection reliability. By optimizing the coverage area and connection quality, Central WiFiManager enables network administrators to provide a better wireless service at a lower deployment cost, resulting in a higher return on investment.

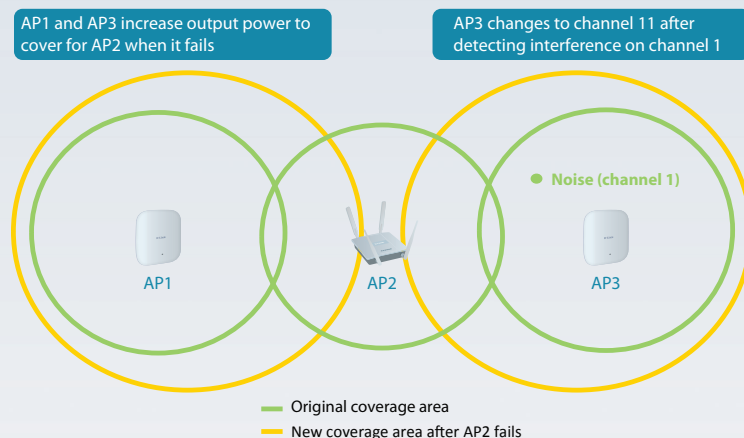





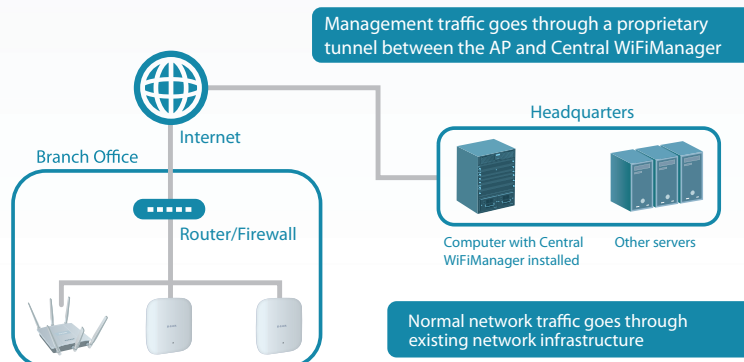



Deploying Central WiFiManager is also much simpler compared to traditional hardware controller solutions as it can be installed on any server running a recent version of Microsoft Windows.<sup>1</sup> Central WiFiManager software operates transparently on the network meaning the access point can be deployed anywhere in a customer's Layer 2/3 environment. Management traffic to and from the target access points will go through an authorized tunnel to Central WiFiManager while normal network traffic will go through existing networking infrastructure unimpeded.

The Central WiFiManager management interface is also remotely accessible via its built-in web server. Administrators can use a web browser to connect to computers with Central WiFiManager installed to manage their WLAN network and wireless access points from anywhere.



### Wireless Access Points - Compatible with Central WiFiManager

	802.11ac Dual Band		
Model	DAP-2695	DAP-2660	DAP-3662
Product Image			
Hardware Version	A1	A1	A1
2.4 GHz Speed <sup>5</sup>	450 Mbps	300 Mbps	300 Mbps
5 GHz Speed <sup>5</sup>	1300 Mbps	867 Mbps	867 Mbps
Number of SSIDs	16 (8 per radio)	16 (8 per radio)	16 (8 per radio)
Ethernet Interface	2 x Gigabit Ethernet	1 x Gigabit Ethernet	2 x Gigabit Ethernet
PoE	802.3at	802.3af	802.3af
Max Tx Power	2.4 GHz: 27.5 dBm 5 GHz: 27.5 dBm	2.4 GHz: 26 dBm 5 GHz: 26 dBm	2.4 GHz: 26 dBm 5 GHz: 26 dBm
Antenna Type	6 External omni-directional	4 Internal omni-directional	4 Internal omni-directional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 6 dBi	2.4 GHz: 3 dBi 5 GHz: 4 dBi	2.4 GHz: 6 dBi 5 GHz: 6 dBi
Mounting Type	Wall/Desktop	Wall/Ceiling/Desktop	Wall/Pole
Indoor / Outdoor	Indoor/Plenum rated	Indoor	Outdoor IP67 rated

	802.11n Dual Band		802.11n Single Band		
Model	DAP-2690	DAP-2553 <sup>4</sup>	DAP-2360	DAP-2330	DAP-2310
Product Image					
Hardware Version	B1	B1	B1	A1	B1
2.4 GHz Speed <sup>5</sup>	300 Mbps	450 Mbps	300 Mbps	300 Mbps	300 Mbps
5 GHz Speed <sup>5</sup>	300 Mbps	450 Mbps	---	---	---
Number of SSIDs	16 (8 per radio)	4	8	8	8
Ethernet Interface	1 x Gigabit Ethernet	1 x Gigabit Ethernet	1 x Gigabit Ethernet	1 x Gigabit Ethernet	1 x Gigabit Ethernet
PoE	802.3af	802.3af	802.3af	802.3af	802.3af
Max Tx Power	2.4 GHz: 23 dBm 5 GHz: 23 dBm	2.4 GHz: 21 dBm 5 GHz: 20 dBm	2.4 GHz: 26 dBm	2.4 GHz: 26 dBm	2.4 GHz: 26 dBm
Antenna Type	4 External omni-directional	3 External omni-directional	2 External omni-directional	2 Internal omni-directional	2 External omni-directional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 6 dBi	2.4 GHz: 3 dBi 5 GHz: 5 dB	2.4 GHz: 5 dBi	2.4 GHz: 3 dBi	2.4 GHz: 2 dBi
Mounting Type	Wall/Desktop	Wall/Desktop	Wall/Desktop	Wall/Ceiling/Desktop	Wall/Desktop
Indoor / Outdoor	Indoor/Plenum rated	Indoor	Indoor/Plenum rated	Indoor	Indoor

## Central WiFiManager Software Controller

Technical Specifications		
WLAN Management		
Maximum APs per Device (Controller)	• 500 <sup>2</sup>	
WLAN Management Features	• AP grouping • Multi-tenancy	• Visualized topology • NAT pass-through
AP-Controller Connection Mode	• Bridge mode	
User Authentication		
Guest Portal	• Captive portal	
Authentication Method	• Local • POP3 • RADIUS	• LDAP • Voucher
Hotspot Features	• Built-in support for voucher-based authentication • Built-in hotspot manager for voucher creation and guest management	• Rate limiting and bandwidth control for guest and hotspot portal
Wireless Features		
RF Management and Control	• Auto Output Power Control • Auto Channel	• Self-healing around failed APs
Multiple SSIDs per Radio (AP)	• 8	
Advanced Wireless Features	• Band steering • L2 roaming	• Bandwidth optimization
WIDS System	• Rogue AP detection	
System Management		
Management Interface	• Web-based user interface	
Minimum System Requirements	• Computer running Microsoft Windows 7 or Windows Server 2008/2012	
Online Check	• Firmware	• Module
Scheduling	• Firmware update	• Configuration update

<sup>1</sup> Supported Operating Systems: Microsoft Windows 7 or Windows Server 2008/2012.

<sup>2</sup> Number of wireless access points supported depends on the specification of the computer on which Central WiFiManager is installed. To support 500 APs, a computer with at least an Intel Core i5 3.2 GHz with 4 GB RAM and 2 TB hard drive is recommended.

<sup>3</sup> Supported D-Link access point models: DAP-2695, DAP-2660, DAP-3662, DAP-2690/B1, DAP-2553/B1, DAP-2360/B1, DAP-2330, DAP-2310/B1.

<sup>4</sup> Central WiFiManager Support for DAP-2553/B1 is currently limited to configuration in the 2.4 GHz band only.

<sup>5</sup> Maximum wireless signal rate derived from IEEE standard 802.11 and 802.11ac specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

Updated 03-12-2015  
CWM-100\_REVA\_DATASHEET\_1.00\_EN\_US.PDF

## For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com