



AC1200 Speeds



Smart Signal Indicator



Simultaneous Dual Band



Gigabit Ethernet



DAP-1620

AC1200 Wi-Fi Range Extender

Features

Connectivity

- Wireless AC gives you high-speed wireless connectivity for your devices
- Wireless 802.11n/g/a backward compatibility
- Wireless speeds of up to 1200 Mbps¹
- Dual-band connectivity for greater flexibility and reduced interference
- 10/100/1000 Gigabit Ethernet Port
- AP mode ideal for homes that are pre-wired for ethernet or for extended coverage

Security

- WPA2/WPA wireless encryption to keep your wireless connection secure
- Wi-Fi Protected Setup (WPS) for secure setup with the simple press of a button

Easy to Use

- One-piece wall plug design is compact, portable, and does not require additional power cables
- Built-in setup wizard and QRS Mobile app for mobile devices guide you through installation

Overview


The DAP-1620 AC1200 Wi-Fi Range Extender will extend the coverage of your home's existing wireless network and eliminate dead zones. With a compact design and wireless speeds of up to 1200Mbps, the DAP-1620 will let you enjoy a fast wireless connection.

Extend your home wireless coverage

You can extend your wireless network using Wi-Fi or using an Ethernet cable. Either way, you will extend your home's wireless coverage without worrying about signal strength. Dual-band technology helps reduce interference from nearby wireless transmitters in the home, and also provides backward compatibility with older wireless devices in your network. Ultra fast wireless transfer rates for all of your web browsing, HD media streaming, and gaming needs.

Smart Signal Indicator

Don't worry about dead spots and not knowing the best signal strength for the best coverage. The Smart Signal Indicator will help you find the best location for optimal coverage throughout your home so you can enjoy more of what you like most in life.

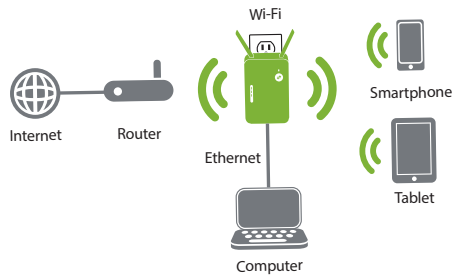

Technical Specifications

General

Device Interfaces	<ul style="list-style-type: none"> • 802.11 ac/g/n/a wireless LAN • 10/100/1000 Ethernet Port 	<ul style="list-style-type: none"> • Reset Button • WPS Button
LEDs	<ul style="list-style-type: none"> • Status/WPS 	<ul style="list-style-type: none"> • 3 Segment Wi-Fi Signal Strength Indicator
Standards	<ul style="list-style-type: none"> • IEEE 802.11ac • IEEE 802.11n • IEEE 802.11g 	<ul style="list-style-type: none"> • IEEE 802.11b • IEEE 802.11a • IEEE 802.3ab
Antennas	<ul style="list-style-type: none"> • Two external antennas 	
Functionality		
Wireless Security	<ul style="list-style-type: none"> • Wi-Fi Protected Access (WPA/WPA2) 	<ul style="list-style-type: none"> • WPS (PBC)
Advanced Features	<ul style="list-style-type: none"> • D-Link One-Touch Extender Setup 	
Device Management	<ul style="list-style-type: none"> • Supports QRS Mobile app for iPhone, iPad, iPod touch, and Android mobile devices 	<ul style="list-style-type: none"> • Web UI

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2015 D-Link Corporation. All rights reserved.

Updated August 3, 2015

D-Link[®]

Technical Specifications Continued	
Physical	
Dimensions	• 2.10 x 2.50 x 3.75 inches
Weight	• 0.14 lbs
Power	• Input: 110 to 240 V AC, 50/60 Hz
Temperature	• Operating: 32 to 104 °F • Storage: -4 to 149 °F
Humidity	• Operating: 0% to 90% non-condensing • Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> • FCC • C-Tick • Wi-Fi Certified • UL • IC • CE • EMI/EMC
Warranty	
Warranty	• 1-Year Limited Warranty ²
Order Information	
<i>Part Number</i>	<i>Description</i>
DAP-1620	• AC1200 Wi-Fi Range Extender

¹ Maximum wireless signal rate derived from IEEE Standard 802.11ac, and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, may lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

² 1-year limited warranty valid in the U.S. only

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2015 D-Link Corporation. All rights reserved.

Updated August 3, 2015

