

## Product Highlights

### D-Link Nuclias Cloud Management

Extensive range of management functions can be performed hassle-free from anywhere through the D-Link Nuclias cloud

### Business-Class 802.11ac Wave 2 Connectivity

Increase your network capacity with lightning-fast dual-band 802.11ac Wave 2 wireless, smart load balancing, and PoE-ready Gigabit Ethernet

### Zero-Touch Deployment

Cloud-based auto-configuration allows for swift plug and play installation and eliminates the need for on-site setup



## DBA-1210P

# Nuclias Cloud Wave 2 Access Point

## Features

### D-Link Nuclias Cloud Management

- Centralized cloud-based management
- Zero-touch deployment
- Unlimited scalability with no limitation on the number of supported APs
- Intuitive web and app-based interface
- Real-time at-a-glance network information
- Management of multiple sites and devices through single pane of glass
- Over-the-air firmware updates through the cloud
- Instant alerts and notifications

### Best-in-class Built for Enterprise Access Point

- IEEE 802.11ac Wave 2 wireless
- 2 x 2 MU-MIMO with two spatial streams
- Up to 1.3 Gbps<sup>2</sup> throughput
- Supports IEEE 802.3af Power over Ethernet (PoE)
- Integrated DHCP server
- WPA/WPA2-Personal/Enterprise
- WPA3<sup>3</sup>
- Supports RADIUS client and Cipher negotiation

D-Link Nuclias is an innovative cloud networking solution that allows you to centrally manage your entire network from anywhere, any time through its intuitive portal interface or mobile app. Featuring a full range of cloud-managed access points and switches supported by zero-touch deployment, Nuclias enables small businesses and enterprises to quickly deploy and build a powerful and versatile global wired and wireless network.

The DBA-1210P Nuclias Cloud Wave 2 Access Point is deployed as a pre-managed, zero-configuration access point controlled through the D-Link Nuclias cloud<sup>1</sup>. It is a best-in-class indoor access point designed specifically for enterprise environments. With next-generation 802.11ac Wave 2 dual-band concurrent 2.4 GHz and 5 GHz radios, the DBA-1210P offers high combined data rates to wireless clients allowing for lightning-fast access to bandwidth-intensive applications such as data, voice, and video streaming.

## Centralized Management With D-Link Nuclias

Designed to be managed through the D-Link Nuclias cloud, the DBA-1210P is easily set up with the help of the intuitive D-Link Nuclias browser-based or mobile app interface. Centralized cloud management allows for zero-touch provisioning, enabling businesses to quickly configure, deploy, maintain, and expand their network remotely. Configuration settings can be set up, managed, and deployed through the cloud anytime, anywhere through any web browser or the dedicated mobile app, meaning devices can be deployed at a remote location without any need for trained on-site staff. Similarly, over-the-air firmware are automatically pushed to devices through the cloud.

## Hassle-free Administration and Versatile Deployment

Using D-Link Nuclias, businesses can now more effectively organize their entire wireless network, manage multiple APs simultaneously, and monitor live network statistics. With the user-friendly single pane of glass management console, administrators have access to an intuitive way of organizing the network into multiple sites, which simplifies management

across multiple areas. With no limitation on the number of devices, businesses can easily cater to the demands of a growing network by simply adding more devices to the network.

### Automated Monitoring and Alerts

Through the intuitive Nuclias dashboard, administrators can remotely view real-time information about the network and get an instant overview of key network statistics such as performance, connectivity, and network usage. Administrators can filter and customize the dashboard to display only the necessary information for a more focused experience. Administrators can be ahead of any problems with instant push notifications and alerts that can be customized to ensure that administrators can swiftly identify problems and perform immediate troubleshooting without the need for on-site staff.

### Enterprise Security

To ensure the safety and reliability of all sensitive traffic, all management data to and from the cloud is separated from regular data using an SSL encrypted out-of-band connection. In addition, Nuclias offers a range of industry standard authentication and authorization methods to control user access. Administrator can configure external RADIUS servers and set up IP and MAC-based access control lists to authenticate and authorize clients and create a safe and trusted network environment. The DBA-1210P supports both Personal and Enterprise versions of WPA and WPA2 (802.11i), as well as MAC address filtering, wireless LAN segmentation, SSID broadcast disabling, and wireless broadcast scheduling to further help protect the wireless network.

## Technical Specifications

### General


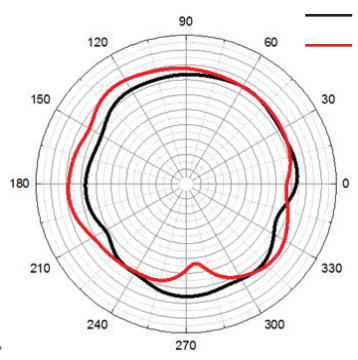
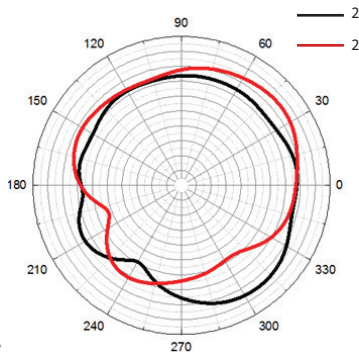

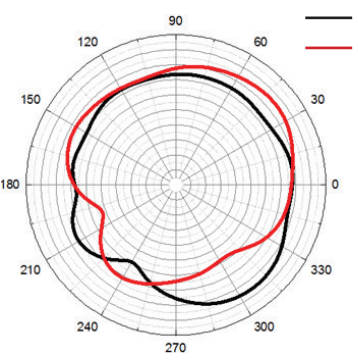
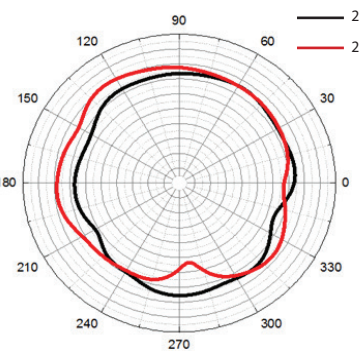

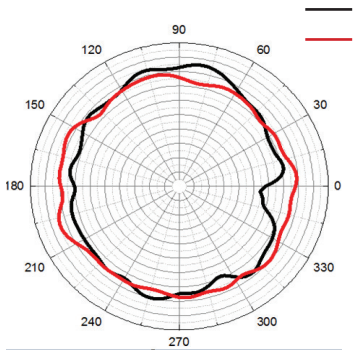
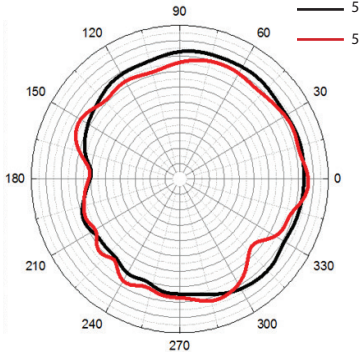

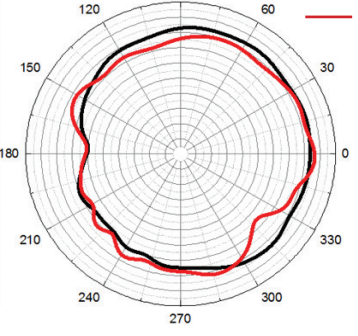
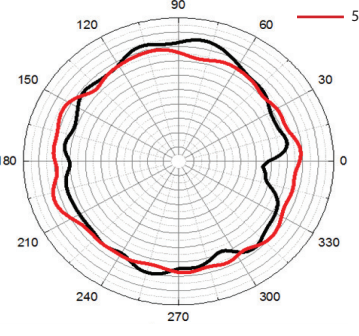
Interfaces	<ul style="list-style-type: none"> <li>IEEE 802.11a/b/g/n/ac Wave 2 wireless</li> </ul>	<ul style="list-style-type: none"> <li>1 x 10/100/1000 Mbps Ethernet PoE port</li> </ul>
Standards	<ul style="list-style-type: none"> <li>IEEE 802.11a/b/n/g/ac Wave 2</li> <li>IEEE 802.3az Energy-Efficient Ethernet (EEE)</li> <li>IEEE 802.3af Power over Ethernet (PoE)</li> </ul>	<ul style="list-style-type: none"> <li>IEEE 802.3i/u/ab</li> <li>IEEE 802.3x Flow Control</li> </ul>
LEDs	<ul style="list-style-type: none"> <li>Power/Status</li> </ul>	
Antenna	<ul style="list-style-type: none"> <li>Built-in 2 x 2 MU-MIMO antenna</li> </ul>	
Maximum Output Power	<ul style="list-style-type: none"> <li>2.4 GHz: 20 dBm</li> </ul>	<ul style="list-style-type: none"> <li>5 GHz: 20 dBm</li> </ul>
Data Signal Rate	<ul style="list-style-type: none"> <li>2.4 GHz: Up to 400 Mbps<sup>2</sup></li> </ul>	<ul style="list-style-type: none"> <li>5 GHz: Up to 867 Mbps<sup>2</sup></li> </ul>

### Functionality

Security	<ul style="list-style-type: none"> <li>WPA3-Personal/Enterprise<sup>3</sup></li> <li>WPA2-Personal/Enterprise</li> <li>WPA-Personal/Enterprise</li> <li>MAC address filtering</li> </ul>	<ul style="list-style-type: none"> <li>SSID isolation</li> <li>Guest isolation</li> <li>Captive portal</li> <li>Station isolation</li> </ul>
Maximum SSIDs	<ul style="list-style-type: none"> <li>Supports up to 16 SSIDs per device</li> <li>Up to 8 SSIDs per wireless band</li> </ul>	

### Physical

Dimensions	<ul style="list-style-type: none"> <li>170 x 170 x 28 mm (6.69 x 6.69 x 1.10 in)</li> </ul>	
Weight	<ul style="list-style-type: none"> <li>Without mount: 320 g (0.71 lbs)</li> </ul>	
Power Input	<ul style="list-style-type: none"> <li>IEEE 802.3af Power over Ethernet (PoE)</li> </ul>	<ul style="list-style-type: none"> <li>Power adapter: 100 to 240 V AC, 50/60 Hz</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>PoE: 12 W</li> </ul>	<ul style="list-style-type: none"> <li>Power adapter: 12 W</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>Operating: 0 to 40 °C (32 to 104 °F)</li> </ul>	<ul style="list-style-type: none"> <li>Storage: -20 to 65 °C (-4 to 149 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>Operating: 10% to 90% non-condensing</li> </ul>	<ul style="list-style-type: none"> <li>Storage: 5% to 95% non-condensing</li> </ul>
Mean Time Between Failure (MTBF)	<ul style="list-style-type: none"> <li>&gt; 30,000 hours</li> </ul>	
Mounting Options	<ul style="list-style-type: none"> <li>Ceiling mount</li> <li>Wall mount</li> </ul>	<ul style="list-style-type: none"> <li>Desktop (horizontal)</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>CE Class B</li> <li>FCC Class B</li> </ul>	<ul style="list-style-type: none"> <li>UL</li> <li>IC Class B</li> </ul>

Antenna Pattern		
Orientation	H-Plane	E-Plane
<p>2.4 GHz Ceiling Mounted</p> 		
<p>2.4 GHz Wall Mounted</p> 		
<p>5 GHz Ceiling Mounted</p> 		
<p>5 GHz Wall Mounted</p> 		

## Nuclias Cloud Wave 2 Access Point

Warranty	
Warranty	Limited Lifetime Warranty <sup>4</sup>
Order Information	
Part Number	Description
DBA-1210P	Nuclias Cloud Wave 2 Access Point

<sup>1</sup> Active D-Link Nuclias account and valid device license required.

<sup>2</sup> Maximum wireless signal rate derived from IEEE Standard 802.11g, and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

<sup>3</sup> Available in future release, expected in Q1/2019.

<sup>4</sup> Lifetime Warranty available in USA only. Warranty void when not purchased from Authorized US D-Link reseller. Please visit [us.dlink.com](http://us.dlink.com) for list of authorized US resellers."

Updated 2019/02/12

## For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | [dlink.com](http://dlink.com)

©2018 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

Visit [us.dlink.com](http://us.dlink.com) for more details.